

MBS FX PRO II HEEL STRAP INSTALLATION INSTRUCTIONS


1. Prepare Tools:

- 8mm Wrench (F2/F3 ONLY)
- 4mm Hex Key
- 3mm Hex Key




2. Identify Parts

- Ladder Straps
- Heel Straps
- Inside L-brackets
- Outside L-brackets
- New hardware
 - Screw for F2/F3 (4)
 - Screw for F4 (4)
 - Nut (4)
 - Washer (4)

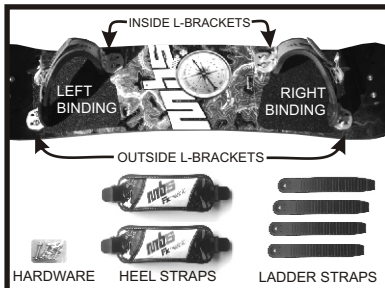

NOTE FOR F3 BINDINGS:

The pictures in this manual show F4 bindings. For F3 bindings the screw direction is reversed and a nut is required for the screw.

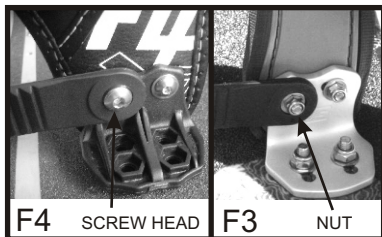

3. Install Ladder Straps:

- For each L-bracket, remove the "strap screw" that is nearest the heel-side edge of your board.
- Attach ladder strap to L-bracket using new hardware provided.




Note: Screw should be tight enough to prevent the Ladder Strap from falling down when raised up.

4. Attach Heel Strap to Ladder Straps by inserting the Ladder Straps through the Cam-lock Buckle and into the "tunnel" of the Heel Strap (under MBS logo).

5. Adjust sizing to fit your foot.

6. Close Cam-lock Buckle to lock into position.

Note: Make sure the teeth of the "Cam" mate well with the Ladder teeth when closing buckle. Considerable force is required to lock close the buckle.

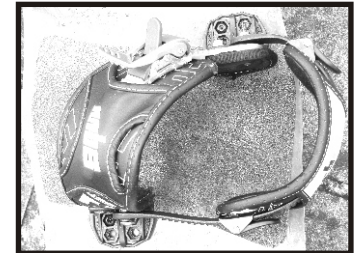

Tips:

1. Stow-Away Position - When you don't want to ride with your heel straps (i.e. for pushing, or for one-foot tricks), flip them up over the top of your bindings and adjust length so they won't fall down.
2. To get your foot in and out of your bindings, use the ratchet buckle on your bindings.



Note: For F2 Bindings, or for F3 Bindings with Cam-Lock buckles, MBS recommends purchasing F3 Ratchet buckles for your Heel Straps. This will make it easier to undo the Heel Strap to get your foot in and out. Visit www.mbs.com for details.

